


111CON	Valve Nom All dimensions in mm / Weights given for 316 unit fitted with Air Motor in kgs	Nom Bore	≥	B	C		E Ve	ghts g	G Iven to	or 316	Junit	大 K		Moto	Z	ס 🎖	ZJ	S	-	U W X	8	×	~	N	<u>A</u>	찍	2	2	Z A1 B1 C1 D1 Weight
+ CT C + F	KD6 150 156 218 180 178 67 75 15 54 50 119 141 4 7.5	150	156	218	180	178	67	75	15	52	50	119	141	4	7.5	152	152 168	4	255	142	142	278	411	134	118	150	115	255 142 142 278 411 134 118 150 115 7°	12.3
Power to Control Powders	KD8 200 206 269 230 228 67 80 15 54 50 119 168 4.5 8	200	206	269	230	228	67	80	15	54	50	119	168	4.5	ထ	203	203 218 4 276 168 168 277 410 130 144 150 115 7°	4	276	168	168	277	410	130	144	150	115	70	17.5

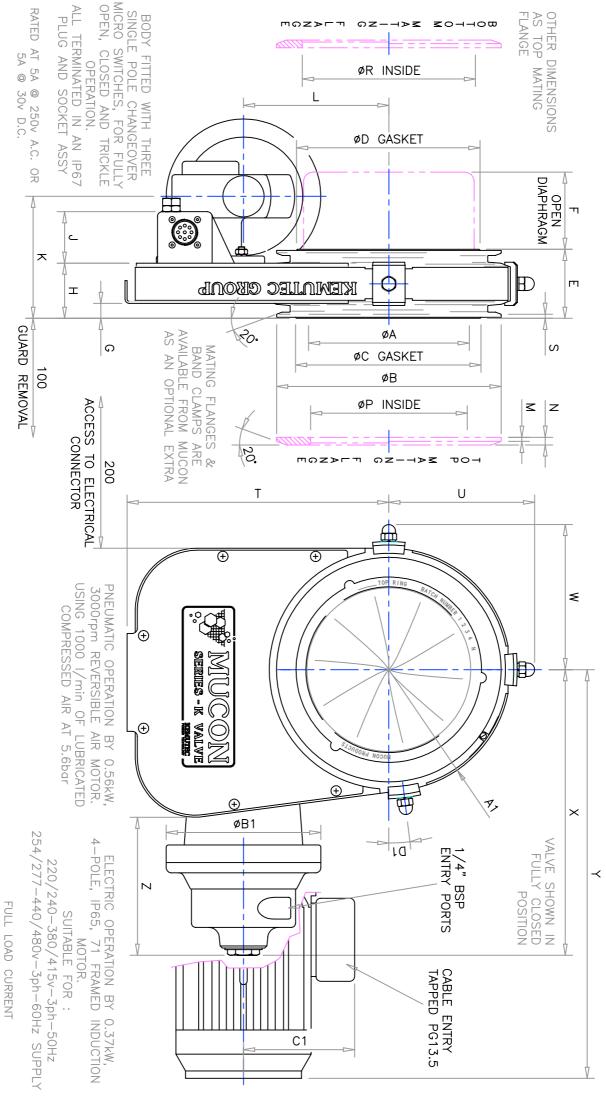

Series KD Quick Release Powered Iris Diaphragm Valve

Although every effort is made to ensure this data is current, our products are subject to ongoing development and accordingly we reserve the right to change specifications and details without prior notice. Always request a certified drawing

 $@ 380v \sim 1.17A$ $@ 415v \sim 1.11A$

12/10/99 B